

The Kramer T10F-22M Inner Frame

Congratulations on purchasing your Kramer **T10F-22M** Inner Frame for the **TBUS-10XL** Table Connection bus.

The **T10F-22M** Inner Frame includes:

- An opening for 1 SID-X1 or other MegaTOOL
- 2 power socket openings
- 1 blank insert
- 1 pass through insert



Note that you can install the optional **T-2INSERT** (P/N: 80-00006699) inside a single power socket opening.



Figure 1: T10F-22M Inner Frame (P/N: 80-000028)

Installing the Wall Plate Inserts

Before installing the inner frame, you need to install wall plate inserts.



Go to <http://www.kramerelectronics.com> to check for up-to-date user manuals and the complete list of Kramer wall plate inserts and module connectors.

You can rearrange or remove any of the blank inserts mounted on the inner frame and replace them with Kramer wall plate inserts or connector modules for interfacing A/V type signals.

To mount a Kramer insert or connector module:

1. Unscrew the two screws that fasten the blank insert to the inner frame and remove the blank insert.
2. Place the required Kramer wall plate insert over the opening, insert the two screws to fix the Kramer insert in place, and tighten them.

Installing the SID-X1 or other MegaTOOL

To install the **SID-X1**, as shown in [Figure 2](#):

1. Fasten each of the supplied TOOL brackets to their location (one on each side).
2. Insert the **SID-X1**, from underneath, through the MegaTOOL opening.
3. Fasten the screws (one on each side) through the inner frame holes and TOOL brackets.

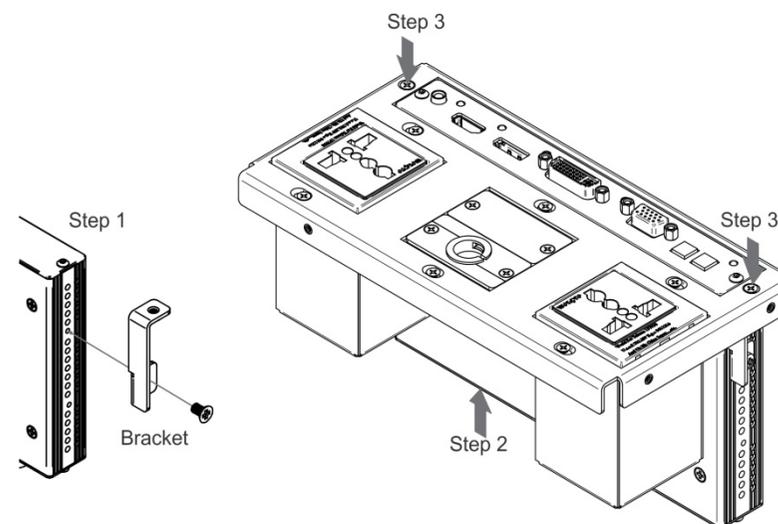


Figure 2: Installing the **SID-X1**

Installing the Inner Frame

To install the **T10F-22M** inner frame:

1. Place the assembled inner frame inside the **TBUS-10XL** enclosure.
2. Set the required height using your fingers to bring the inner frame to the desired position, and then screw and tighten it in place using the height adjustment screws supplied with the inner frame.

Connecting the Cables

When replacing blank inserts with connector inserts (for example, VGA, audio, HDMI and so on):

1. Insert the cables to their appropriate connectors from underneath.
2. Secure the cables to the tie holes on the **TBUS-10XL**.
Do not secure the cables too tightly or too loosely. Leave a small amount of slack.

After the **TBUS-10XL** is connected to mains power and the proper cables, it is ready for use.

Adjusting the Height of the Inner Frame

If needed, you can adjust the inner frame to one of the several possible heights to accommodate large or bulky cables. To adjust, perform the following:

1. Remove the height adjustment screws, while supporting the frame from underneath with your fingers.
2. Raise or lower the connecting surface to the required height, insert the screws, and tighten them in place.



KRAMER ELECTRONICS LTD.

Installation Instructions

MODEL:

T10F-22M
Inner Frame

For the latest information on our products and a list of Kramer distributors, visit our Web site where updates to this user manual may be found.

We welcome your questions, comments, and feedback.

Web site: www.kramerelectronics.com

E-mail: info@kramerel.com



SAFETY WARNING

Disconnect the unit from the power supply before opening and servicing

P/N: 2900-300225 Rev 1



P/N: 2900-300225



Rev: 1