




TP-575

1:2 Twisted Pair & HDMI Line Driver & Distribution Amplifier

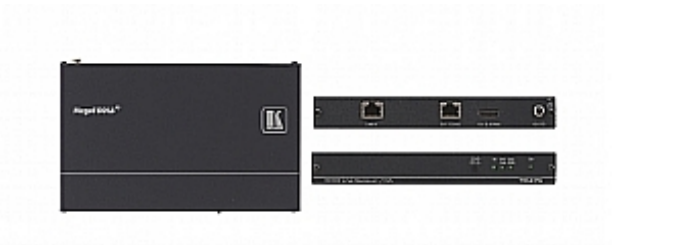

The **TP-575** is a DGKat™ twisted pair line driver for HDMI over twisted pair signals. The unit receives a twisted pair signal and outputs both an HDMI and twisted pair signal to a compatible receiver.

FEATURES

- **Max. Data Rate** - 4.95Gbps (1.65Gbps per graphic channel).
- **HDTV Compatible.**
- **HDCP Compliant.**
- **DGKat™ Signal Integration** - Kramer's unique technology for converting TMDS as well as control and communication to signals that run over twisted pair cables.
- **HDMI Support** - x.v.Color™, HDMI Uncompressed Audio Channels, Dolby TrueHD, DTS-HD.
- **3D Pass-Through.**
- **EDID PassThru** - Passes EDID signals between the source and display.
- **HPD Pass-Through** - Passes Hot Plug Detect signals from display to source.
- **Active Input/Output LED Indicators.**
- **System Range** - Up to 90m (295ft) at 1080i, or up to 30m (98ft) at 1080p on shielded BC-DGKat524 cable. Up to 90m (295ft) at 1080i, or up to 70m (230ft) at 1080p on shielded BC-DGKat623 cable. Up to 100m (330ft) at 1080i or up to 90m (295ft) at 1080p on shielded BC-DGKat7a23 cable.
- **Cable** - For optimum range and performance, use Kramer's BC-DGKat524, BC-DGKat623 and BC-DGKat7a23 cables. Note that the transmission range depends on the signal resolution, graphics card and display used. The distance using non-Kramer CAT 5, CAT 6, and CAT 7 cables may not reach these ranges. Use only shielded cable where both ends of the shield are soldered to ground.
- **Compatible Receivers** - PT-572+, TP-574, TP-575, TP-576.
- **Output Signal Reclocking** - Daisy chains up to 6 receivers for maximum range of 600m using shielded BC-DGKat7a23 cable at 1080i. (For other cables and resolutions, see System Range above.)
- **Power Connect™ System** - A single connection to the TP-575 powers the transmitter, receiver and line driver units.
- **Compact MegaTOOLS™** - 2 units can be rack mounted side-by-side in a 1U rack space with the optional RK-T2B universal rack adapter.

TECHNICAL SPECIFICATIONS

INPUT:	1 DGKat twisted pair on an RJ-45 connector.
OUTPUTS:	1 DGKat twisted pair on an RJ-45 connector, 1 HDMI connector.
MAX. DATA RATE:	4.95Gbps (1.65Gbps per graphic channel).
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI and HDCP.
CONTROLS:	EDID SETUP button.
INDICATOR LEDES:	IN, OUT 1 (LINE), OUT 2 (HDMI), and ON LEDs.
POWER CONSUMPTION:	12V DC, 950mA.
INCLUDED ACCESSORIES:	Power supply.
OPTIONS:	RK-T2B 19" rack adapter.
PRODUCT DIMENSIONS:	18.75cm x 11.50cm x 2.54cm (7.38" x 4.53" x 1.00") W, D, H
PRODUCT WEIGHT:	0.4kg (0.9lbs) approx.
SHIPPING DIMENSIONS:	34.50cm x 16.50cm x 5.20cm (13.58" x 6.50" x 2.05") W, D, H
SHIPPING WEIGHT:	0.9kg (2.0lbs) approx.

