




VA-8xl

8-Channel Balanced Stereo Volume Controller

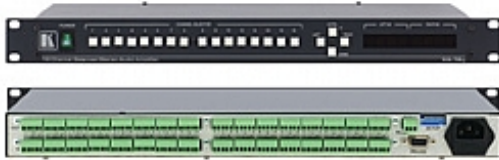

The **VA-8xl** is a high-performance 8 channel-balanced stereo input volume controller for balanced audio signals on terminal block connectors. The volume of each L & R stereo channel can be adjusted independently of the other stereo channel.

FEATURES

- Input - 8 balanced stereo.
- Output - 8 balanced stereo.
- S/N Ratio - >90dB.
- Volume - -95dB to +31dB in 0.5dB steps; L& R channels may be controlled separately or together.
- Control - Front panel, RS-232 and RS-485.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U.

TECHNICAL SPECIFICATIONS

INPUT:	8 balanced stereo audio +4dBu/30k Ω on detachable terminal blocks.
OUTPUT:	8 balanced stereo audio +4dBu/50 Ω on detachable terminal blocks.
GAIN:	-95dB to +31dB.
MAX. OUTPUT LEVEL:	>20dBu balanced (THD+N <0.01).
BANDWIDTH (- 3DB):	20Hz to 40kHz.
NOISE FLOOR:	<90dB (gain 0dB).
THD + NOISE:	0.006% @4dBu 1kHz.
CONTROL:	Front pushbuttons, RS-232, and RS-485.
INDICATORS:	Gain in dB for left and right channels.
POWER CONSUMPTION:	100-240V, 13VA.
INCLUDED ACCESSORIES:	Power cord, null-modem adapter, Windows®-based Kramer control software.
PRODUCT DIMENSIONS:	19" x 7.20 x 1U (43.6cm x 18.30cm 4.36cm) W, D, H
PRODUCT WEIGHT:	2.7kg (6.0lbs) approx.
SHIPPING DIMENSIONS:	55.00cm x 27.60cm x 10.70cm (21.65" x 10.87" x 4.21") W, D, H
SHIPPING WEIGHT:	3.5kg (7.8lbs) approx.

