

The Kramer MTH-2 VESA Adapter Brackets

Congratulations on purchasing your Kramer **MTH-2 VESA Adapter Brackets** for mounting Kramer TOOLS™, Pico TOOLS® and MegaTOOLS® on the rear panel of large displays.

The **MTH-2 VESA Adapter Brackets** kit includes:

- Two TOOL brackets with flexible wings
- Two M3x6 screws

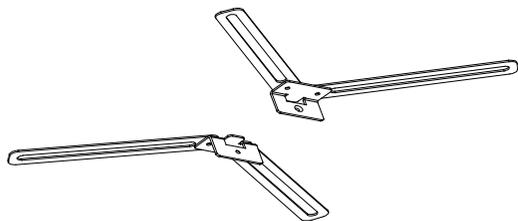


Figure 1: MTH-2 VESA Adapter Brackets

Installation

To mount the **MTH-2 VESA Adapter Brackets**, do the following:

1. Remove the two TOOL M3x6 side screws or use the two screws supplied with the **MTH-2** (for the next step).
2. Attach the pair of flexible brackets. To do so, fasten a bracket to each side of the TOOL using the M3x6 screws.

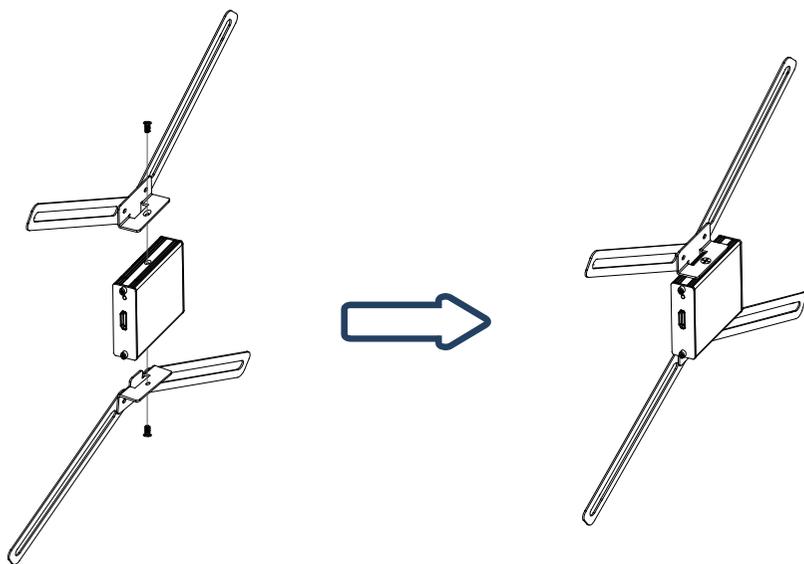


Figure 2: Installing the Brackets

3. Place the TOOL with the brackets over the rear side of the display.
4. Adjust the wings so they fit any four VESA standard holes on the rear side of the display.

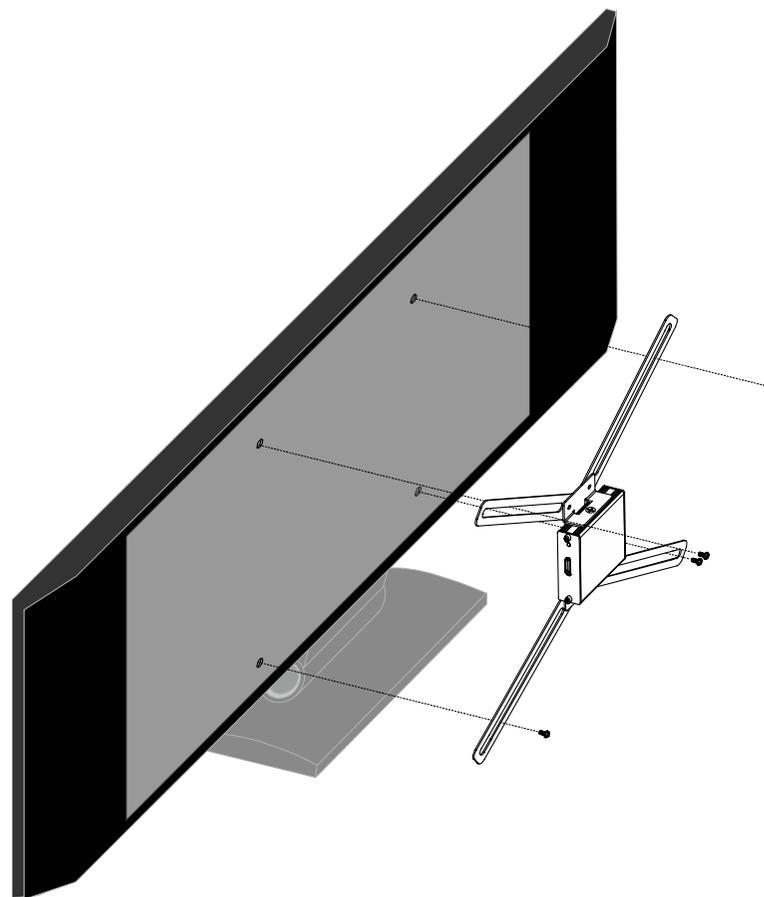


Figure 3: Attaching the TOOL to MTH-2



Note that the **MTH-2** is attached to the rear side of the display using the screws that were supplied with the display (either screwed into its rear side or in a separate bag).

5. Place a spring washer (if supplied by the display manufacturer) over each of the four screws that were supplied by the display manufacturer.
6. Tighten the four screws to attach the **MTH-2** to the rear side of the display.

The location of the screw-holes, as well as the number of screws used for each display may vary, depending on the manufacturer.

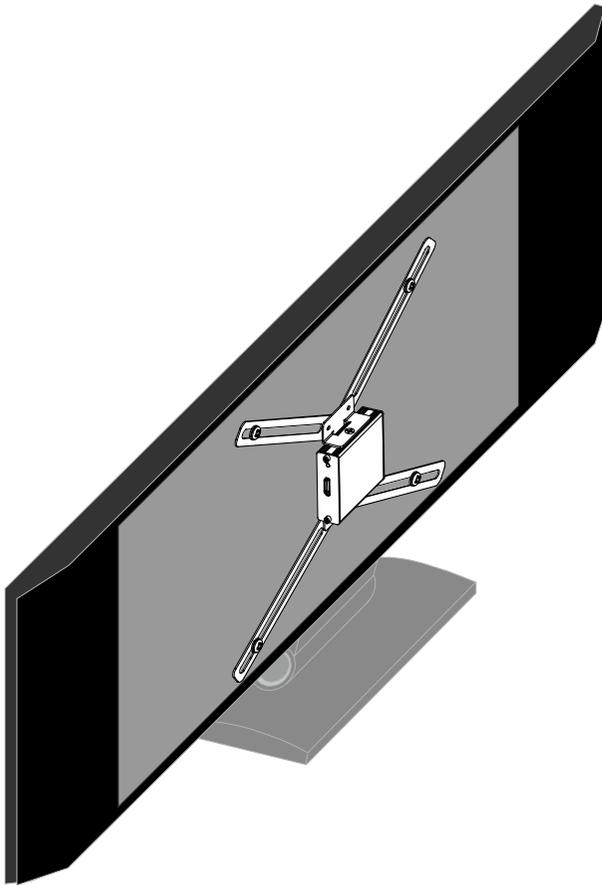


Figure 4: The MTH-2 Attached to the Rear Side of the Display



KRAMER ELECTRONICS LTD.

Installation Instructions

MODEL:

MTH-2
VESA Adapter Brackets

For the latest information on our products and a list of Kramer distributors, visit our Web site where updates to this user manual may be found.

We welcome your questions, comments, and feedback.

Web site: www.kramerelectronics.com

E-mail: info@kramerel.com



SAFETY WARNING

Disconnect the unit from the power supply before opening and servicing

P/N: 2900-300109 Rev 1