

VIA COLLAGE QUICK START GUIDE

For Installer

This guide helps you install and use your product for the first time. For more detailed information, go to **www.True-Collaboration.com** to download the latest manual or scan the QR code above.

STEP 1: Check What's in the Box


- 1. VIA Collage Collaboration Device
- 3. Quick Start Guide
- 2. Power supply (19V DC) with power cords
- 4. DP to HDMI Adapter

STEP 2: Install the VIA Collage

Place the VIA Collage on a table or mount in a rack with optional adapter RK-COLLAGE.

STEP 3: Inputs and Outputs at a Glance

Always switch off the power on each device before connecting it to your VIA Collage.

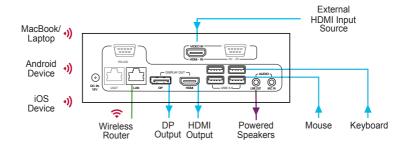

Always use Kramer high-performance cables for connecting AV equipment to the ${\bf VIA}$ ${\bf Collage}$.

STEP 4: Connect the Unit

- · Connect keyboard and mouse
- · Connect your main display (dual displays are optional)
- Connect a Local Area Network (LAN) cable for connection to your network or use a router for connection to Wi-Fi
- Connect the power supply
- Turn on the device

STEP 5: Configure VIA Collage

Open the VIA Collage menu and click on Features, then on Settings.

Enter password: supass.

The Settings Menu tabs are:

- LAN Settings Configure your network parameters and apply settings
- Room Name/Code Manage room code and name preferences
- · Configurations Activate/deactivate PiP, media mode and other options
- System Controls Manage your display and audio settings, run control panel, select your language, etc.
- Wallpaper Insert a custom wallpaper image
- Third Party Apps Install/remove third party software applications
- Authentication Activate moderator mode and define moderator/participant settings
- · Mirroring Activate/deactivate iOS mirroring support and configure it

After settings are defined, click on reboot button to apply all settings. For more details, read the Settings section in the user manual.





VIA COLLAGE QUICK START GUIDE

For User

STEP 1: Connect Your Device to the Proper Network

Connect your device to the same network used by Kramer **VIA Collage** in the specific meeting room (either Wi-Fi or LAN).

STEP 2: Run or Download the Application

MAC or PC

- Navigate to the embedded Web page of VIA Collage by entering the Room Name of the VIA into your computer's browser.
- Select Click to Run to execute the application only (intended for guests who will be using the VIA once) or select Click to Install VIA to download the VIA application on your computer (intended for regular users of the VIA).





iOS/Android

Download and install the free VIA App from Apple's App Store or Google's Play Store.
Use the QR code above.

STEP 3: Login




Room Name: Copy the room name as appears in the wallpaper (IP Address).

Nickname: Enter a name for your device.

Room Code: Enter a 4-digit code as it appears in the wallpaper.

Login: Press Login to join the meeting.

STEP 4: Main Menu

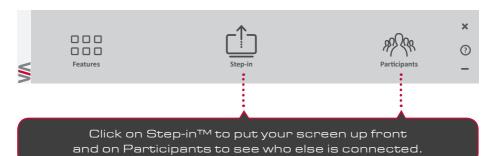

STEP 5: Features



Wireless Connection

Bring your own device (BYOD) and join the session through wireless connection.



MultiMedia

Share uninterrupted full HD wireless video streaming (up to 1080p60) and photos.



Cloud

Drag and drop files to the cloud to share instantly with everyone in the meeting.



File Transfer

Share any size file with any number of participants.



Whiteboard

Annotate, illustrate and edit shared documents: touch-screen compatible.



Start Collaboration

Click to collaborate through a common display, using your own device. Multiple users can interact and control what's happening on the main display at the same time.



iOS Mirroring

Show any content from your iOS device on the main display



Enable Control

Give a participant control over the presenter's MAC® or PC laptops.



Chat

Send an instant message to any other participant.



Web Browser

Open any browser to display content directly from a Web site.



View Main Display

View the main screen on your own device.



Third Party Apps

Supports office applications and conferencing programs such as Skype®, WebEx®, Go To Meeting®, Lync® and more.



HDMI Input 1

Connect any HDMI source (camera, DVD, Blu-ray $^{\text{TM}}$) and present it on the main display.





PN: 2900-300475QS